




## WALL SURFACE

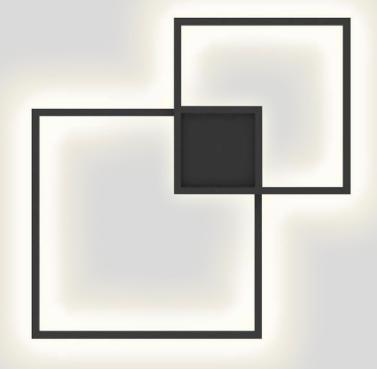





## 1.0

I EED 38W | 220-240VAC | 50-60Hz PCB 3-step | phase-cut dim aluminium powder coated opal PMMA cover | direct 2.0

ED LED 47W | 220-240VAC | 50-60Hz PCB 3-step | phase-cut dim aluminium powder coated opal PMMA cover | direct/indirect





CODE 149184W\_ 149184B\_

## **Light Colour Selection**

	LUMEN   CRI	CODE
2700K	2100 >80	2
3000K	2250 >80	4



## **Light Colour Selection**

	LUMEN   CRI	CODE
2700K	370/2100   >80	2
3000K	400/2250 >80	4