





OBOQ SQUARE

CEILING RECESSED

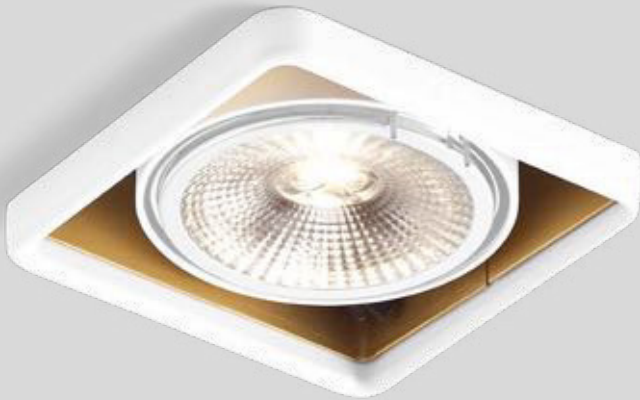

1.0 LED111

LED 10W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium | steel powder coated

1.02kg IP20 0.3° P 38°

140x140 25°/25° 360° 150 2-25

CODE

	120268J_
	120268E_
	120268K_

Light Colour Selection

	LUMEN CRI	CODE
2700K	710 >80	2
3000K	730 >80	4

1.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium | steel powder coated

1.02kg IP20 0.3° P 40°

140x140 25°/25° 360° 150 2-25

CODE

	120278J_
	120278E_
	120278K_

Light Colour Selection

	LUMEN CRI	CODE
2700K	1050 >80	2
3000K	1200 >80	4

1.0 QR11

QR11 max.75W | G53
12V | excl. power supply
aluminium | steel powder coated

0.84kg IP20 0.9°

140x140 25°/25° 360° 150 2-25

CODE

	120230JO
	120230EO
	120230KO


ALWAYS USE

power supply

CODE

12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 540



back