






**ROB**  
**OUTDOOR**  
**CEILING SURFACE**

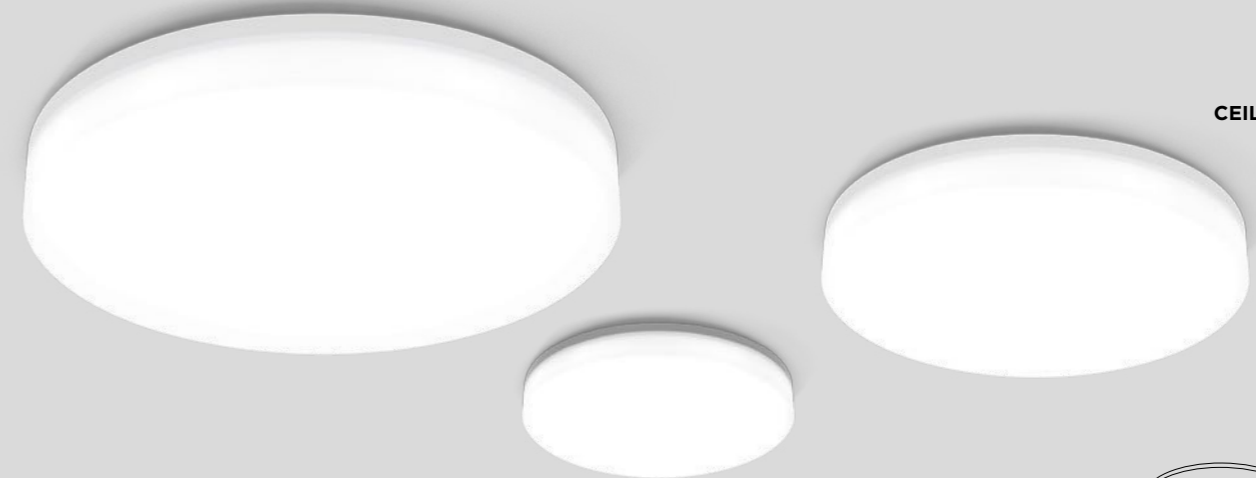

**1.6**

LED 12W | 220-240VAC | 50-60Hz  
 PCB 3-step | phase-cut dim  
 aluminium powder coated  
 opal PMMA cover

0.70kg IP44

2700K | >80 CRI | 860lm

CODE  
 701184W2

3000K | >80 CRI | 950lm

CODE  
 701184W4  
 701184S4

**OPTIONAL**

dimmer  
 CODE  
 for switch 90019017  
 for din rail 90019018

more specs on page 576

**2.6**

LED 18W | 220-240VAC | 50-60Hz  
 COB 3-step | phase-cut dim  
 aluminium powder coated  
 opal PMMA cover

1.20kg IP44

2700K | >80 CRI | 1250lm

CODE  
 701284W2

3000K | >80 CRI | 1380lm

CODE  
 701284W4  
 701284S4

**OPTIONAL**

dimmer  
 CODE  
 for switch 90019017  
 for din rail 90019018

more specs on page 576

**3.5**

LED 32W | 220-240VAC | 50-60Hz  
 COB 3-step | phase-cut dim  
 aluminium powder coated  
 opal PMMA cover

1.90kg IP44

2700K | >80 CRI | 1820lm

CODE  
 701384W2

3000K | >80 CRI | 1950lm

CODE  
 701384W4  
 701384S4

**OPTIONAL**

dimmer  
 CODE  
 for switch 90019017  
 for din rail 90019018

more specs on page 576

